




Aluminium dimmable LED profile.  
 The shape of the NODO track was designed to easily integrate MICROLED yet be hidden from view.  
 Attachment to the track using the integrated double sided tape.

The electric installation is independent from the system.


180 LED/mt - 11W/mt - 24V  
 [1100 lm/mt - 3000K / 1350 lm/mt 4000K]

MICROLED

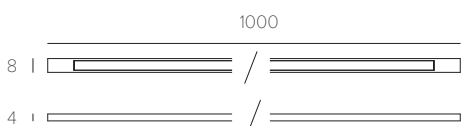


63010	Satin silver	100 cm	3000K
63510	Black	100 cm	3000K
64010	Satin silver	100 cm	4000K
64510	Black	100 cm	4000K
63020	Satin silver	200 cm	3000K
63520	Black	200 cm	3000K
64020	Satin silver	200 cm	4000K
64520	Black	200 cm	4000K
63030	Satin silver	300 cm	3000K
63530	Black	300 cm	3000K
64030	Satin silver	300 cm	4000K
64530	Black	300 cm	4000K

End power supply for MICROLED

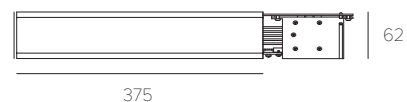

25042	Satin silver	LEFT
25342	White	LEFT
25542	Black	LEFT

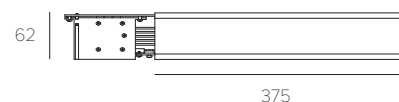


25040	Satin silver	RIGHT
25340	White	RIGHT
25540	Black	RIGHT

Integrated power supply with constant voltage output.  
 Closing terminal included.

INPUT 220/240V AC 50/60 Hz  
 OUTPUT 24V - 60W

Remote power supply for MICROLED



25120	70 W
25125	150 W

Power supply with constant voltage output.  
 It must be housed in a remote position with respect to the installation.

INPUT 220/240V AC 50/60 Hz  
 OUTPUT 24V - 70W / 150W