



Power feed in aluminum. Closing terminal included.


The 19040 strain relief kit must be used when the system is installed with a 19030 suspension cable.




Central power feed in aluminum.

The 19040 strain relief kit must be used when the system is installed with a 19030 suspension cable.

Power feed

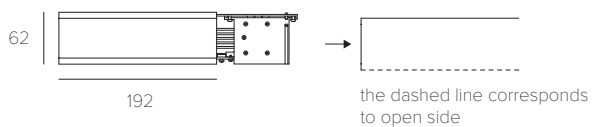

- | | | |
|-------|--------------|------|
| 19002 | Satin silver | Left |
| 19302 | White | Left |
| 19502 | Black | Left |

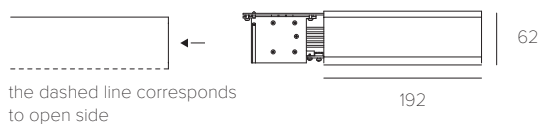


- | | | |
|-------|--------------|-------|
| 19000 | Satin silver | Right |
| 19300 | White | Right |
| 19500 | Black | Right |

Net weight Kg 0.38

IP20 CE

Central power feed

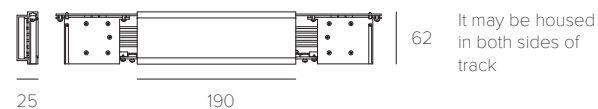

- | | |
|-------|--------------|
| 19004 | Satin silver |
| 19304 | White |
| 19504 | Black |

Net weight Kg 0.44

IP20 CE