



Track made of extruded aluminium cut to size.

Electrical copper conductors inserted in a profile of insulating material [glow wire 850°].

With a single-phase AC connection, the maximum load is 16A [3840W].

NODO track in the 3-phase version, if connected to the 3-phase alternating current, allows a maximum load of 16A per phase [3 x 3840W = 11520 W].

The track has grooves that enable the anti-glare installation of the 8 mm LED strips on both sides [Side Light] and LED strip up to 20 mm on the back [Up Light] if suspended.

To complete with supports, close terminal, joint, power feed and if necessary dust proof / steam seal.

NODO allows elements to be fed at any point on the track.


It is possible to install the system to the ceiling, wall or fastened to the work surface.

Track cut to measure to be installed by a qualified technician.

During installation, keep the minimum distances indicated with respect to possible encumbrances to allow the insertion of sockets, lights and accessories.

Made in compliance with lighting system and electrical conduit safety standards [CEI-EN 61534-1/21 and CEI-EN 60598-1] to be installed in accordance with the installation provisions.

Nodo is protected internationally by industrial invention patents.

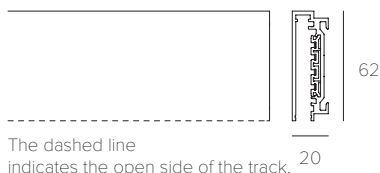

1 phase track

11010	Satin silver	100 cm
11310	White	100 cm
11510	Black	100 cm
11020	Satin silver	200 cm
11320	White	200 cm
11520	Black	200 cm
11030	Satin silver	300 cm
11330	White	300 cm
11530	Black	300 cm
11040	Satin silver	400 cm
11340	White	400 cm
11540	Black	400 cm

2 phase track

14010	Satin silver	100 cm
14310	White	100 cm
14510	Black	100 cm
14020	Satin silver	200 cm
14320	White	200 cm
14520	Black	200 cm
14030	Satin silver	300 cm
14330	White	300 cm
14530	Black	300 cm
14040	Satin silver	400 cm
14340	White	400 cm
14540	Black	400 cm

3 phase track

10010	Satin silver	100 cm
10310	White	100 cm
10510	Black	100 cm
10020	Satin silver	200 cm
10320	White	200 cm
10520	Black	200 cm
10030	Satin silver	300 cm
10330	White	300 cm
10530	Black	300 cm
10040	Satin silver	400 cm
10340	White	400 cm
10540	Black	400 cm

Protection rating I

Net weight 1 kg every 100 cm.

